

GRIFFIN

250 Series Hydraulic Power Unit Model 250HPND



MODEL FEATURES

- Self-contained, portable, diesel-driven hydraulic power unit
- Capable of powering hydraulic submersible pumps or other hydraulic equipment
- Operates efficiently at a wide range of conditions
- Can be positioned in remote areas without the need for electrical power and away from the pumphead
- Uses biodegradable oils
- Rugged, quality construction

ENGINE

MAKE: Kubota
MODEL: 1305D
TYPE: 4-cylinder, 4-cycle liquid-cooled, naturally aspirated diesel
DISPLACEMENT: 81.5 cu in.
GOVERNOR: Mechanical
LUBRICATION: Constant pressure, full flow
AIR CLEANER: Dry type reusable
ELECTRICAL SYSTEM: 12V DC
SAFETY SHUTDOWNS: High head temperature, low oil pressure
MANUFACTURER'S PERFORMANCE:
Rated Power—hp (kW)
 intermittent: 26 (19.4)
 continuous: 20.5 (15.3)
Rated speed—rpm: 2400

HYDRAULIC PUMP

TYPE: Rotary Vane
RATED CAPACITY: 7 gpm @ 100 psi @ 1200 rpm
CASING: Class 30 cast iron

HYDRAULIC OIL SYSTEM

CONSTRUCTION: carbon steel
OIL CAPACITY: 34 gallons
RECOMMENDED BIODEGRADABLE OIL: Texaco Code No. 1616 Biostar Hydraulic Oil 46


STANDARD FITTINGS

HIGH PRESSURE: 3/4" Wing-Style Male Quick Disconnect Fitting
LOW PRESSURE: 1" Wing-Style Male Quick Disconnect Fitting
All hoses rated for 3000 psi.

STANDARD EQUIPMENT

- Integral fuel tank with 24 hour run time fuel capacity mounted on I-beam frame
- Center point lifting bail
- Battery box
- Needle valve and pressure gauge
- Hydraulic pressure relief valve
- Hydraulic oil reservoir

HYDRAULIC PUMP OIL FLOW CAPACITY

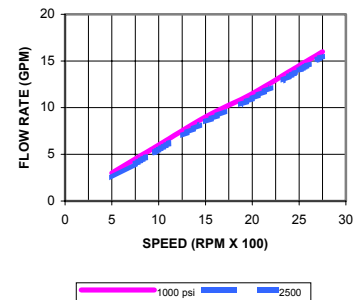

AVAILABLE OPTIONS

- Optional DOT trailer
- Other engines available per customer request (including John Deere, Perkins, Deutz)
- Custom fabrication available

PHYSICAL DIMENSIONS

WEIGHT: 1,840 lbs.
LENGTH: 76"
WIDTH: 36"
HEIGHT: 66"

In the interest of product improvement, specifications may change without notice.



GRIFFIN
PUMP & EQUIPMENT, INC.

5731 Harvey Wilson Drive, Houston, Texas 77020
(713) 671-8157 fax: (713) 675-1304
<http://www.griffinpump.com>
e-mail: gpe@griffinpump.com

GRIFFIN PUMP & EQUIPMENT HYDRAULIC DRIVEN SUBMERSIBLE PUMPS

MODEL: 04MH

IMPELLER: MATERIAL-
HANDLING TYPE
SUCTION: 3"
DISCHARGE: 4"

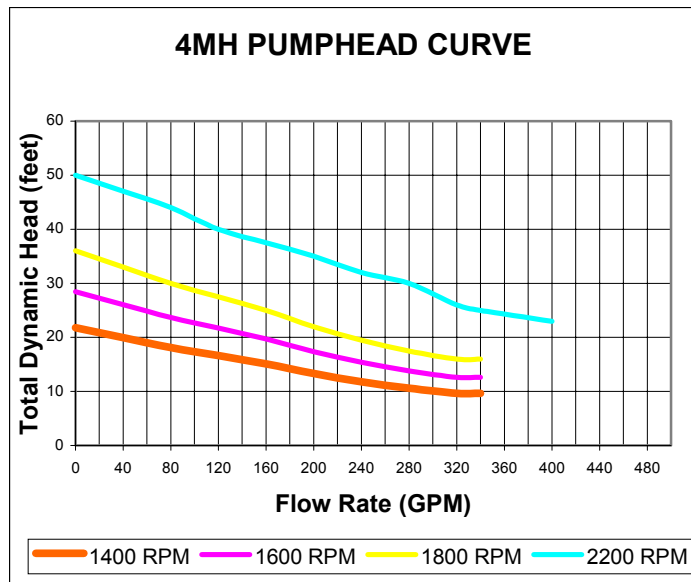
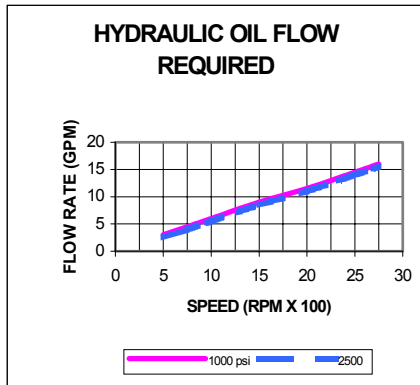


OIL: SAE10W, 150 SSU @ 100deg F

BASED ON 2300 PSI RELIEF VALVE SETTING

MODEL: 06T

IMPELLER: TRASH TYPE
SUCTION: 5"
DISCHARGE: 6"

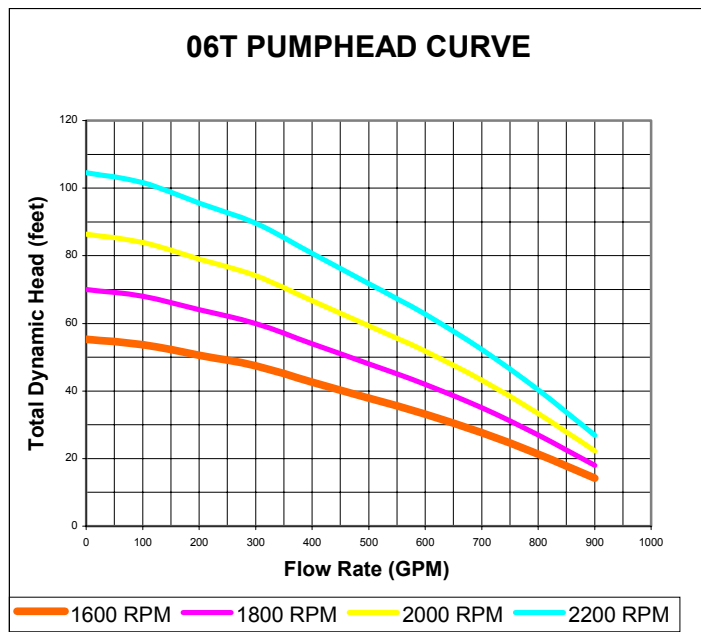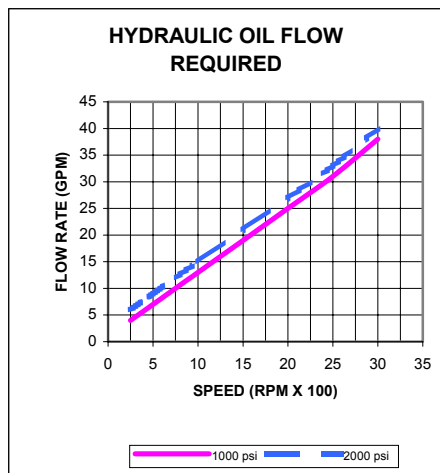

OIL: SAE10W, 150 SSU @ 100deg F

BASED ON 2300 PSI RELIEF VALVE SETTING